



# Datasheet Wireless UC Series

## VT Bluetooth UC Headset



### VT9605BT

Allowed to be paired with total two devices at the same time

Memory function of leather ear cushions for all day comfort

Awesome sound quality for calls and listening to music

Zigzag structure of headband for positioning microphone

Integrated ring-shaped busy lights on both sides of headset


Noise cancelling microphone for clarity voice delivering

Great passive noise cancelling design to keep noise out

Headset base and VT Dongle is optional

## Connects to PC(using BT100U)


## Connects to Smartphone

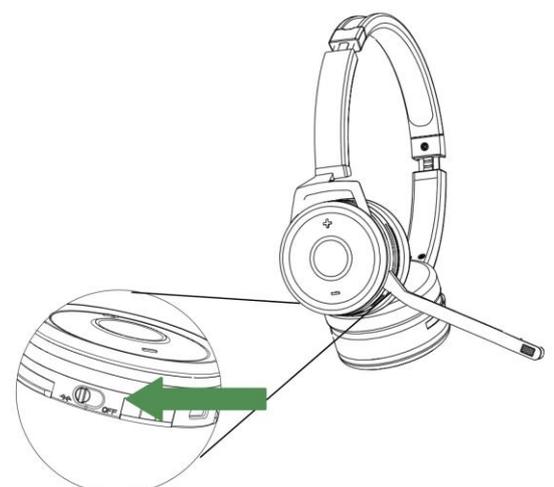

The headset and BT 100U are pre-paired and ready for use

Hold (2 secs) the On/off/connect switch in the connecting position

# How to Use

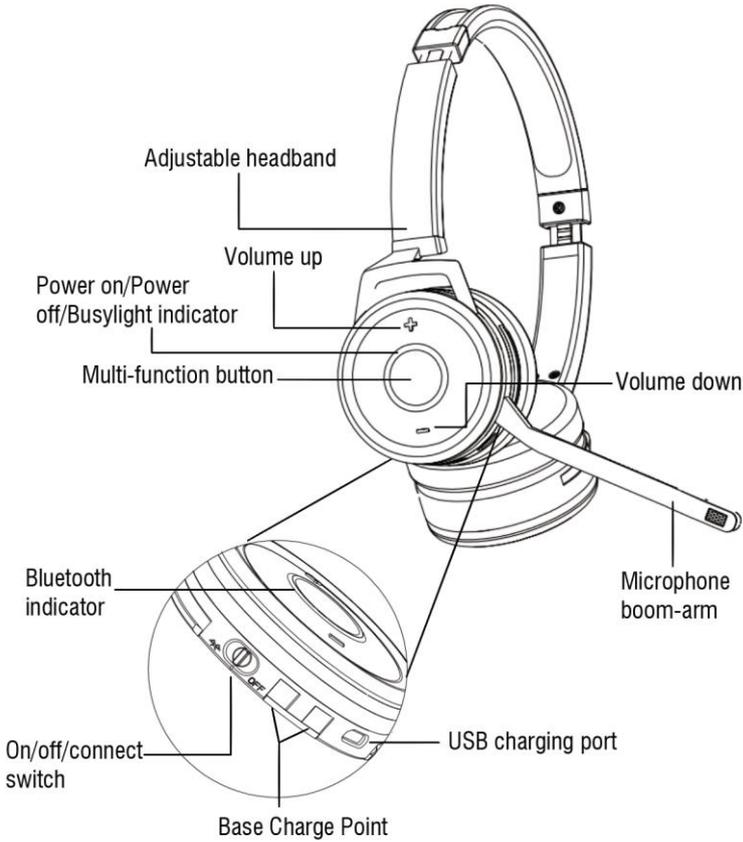

Function	Action	LED Status
Headset on	Slide the On switch	Green Light flash twice in succession
Headset off	Slide the On switch	Red Light flash twice in succession
Pairing	Slide the Pair Button	Blue Light flash
Pairing Successfully		Blue Light flash twice in succession
Standby		Blue Light flash 1 time per 8 secs
Answer/End Call	Tap the Multi-function button	
Reject call	Double-tap the Multi-function button	
Enable/disable Voice prompts	Press and hold the Multi-function button while turning on the headset	
Adjust volume	Tap the Volume up or Volume down button	
Mute/unmute Microphone	Press and hold (2 secs) the Volume down button	

## Technical Specification

Packaging dimensions (unit pack)	Headset: 155x36x180mm / Charging stand(Optional): 100x81x108mm
Weight, headset	158 g
What's in the box	User Guide, VT9605 BT headset, BT 100U USB adapter(optional), charging stand(optional)
Talk time	
Audio control	Hook off/on, Mic Mute, Speaker volume up/down on headset
Connection	Bluetooth®. Allow for dual connectivity for two Bluetooth® devices simultaneously
Bluetooth®	Class 1 (up to 30 meters / 100 feet) and Bluetooth 4.2, can be upgraded to BT5.0
Integrated busylight	Red lights on both ear cups are activated automatically when on a call,
Microphone type	Medium-length boom arm with Noise Cancelling uni-directional
Speaker bandwidth music mode	20Hz - 20kHz
Speaker bandwidth communication mode	150Hz - 6.8kHz
Microphone frequency range	150Hz - 6.8kHz
Operating temperature	-10 °C to + 55 °C